


Type Designation	4061
Designation IEC	(LR 8 D 425)
System	Zn-MnO <sub>2</sub> (Alkaline)
Shelf Life (Coding)*	3 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	620 (discharge with high-resistance)
Permissible Temperature Range	- 10 °C ... 50 °C
Weight, approx. [g]	6.6
Volume [ccm]	2.2



Dimensions [mm]

	min:	max:
∅	7.7	8.3
A	41.5	42.5
B	2.3	
C		0.1
E		3.8
F	0.7	
G		

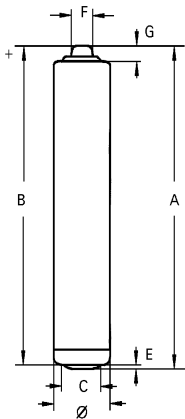

Typical Capacities (at 20°C):

Discharge Type	Load	End Voltage[V]	0.9
Lighting 5M/D, 7D/W	5,1 Ω	Time [min]	119
		Capacity [mAh]	462
		Energy [mWh]	554
Discharge Type	Load	End Voltage[V]	0,9
Service output 1H/D, 7D/W	75 Ω	Time [h]	36,8
		Capacity [mAh]	620
		Energy [mWh]	788
Discharge Type	Load	End Voltage[V]	1,1
Laser pointer 1H/D, 7D/W	75 Ω	Time [h]	29,1
		Capacity [mAh]	515
		Energy [mWh]	681

**No publication or circulation of data to third parties without consent of VARTA Consumer Batteries**

\* In consideration of typical loss of capacity at storage and application.